

Middlesex University Research Repository

An open access repository of

Middlesex University research

<http://eprints.mdx.ac.uk>

de Rosa, Gustavo H. ORCID logoORCID: <https://orcid.org/0000-0002-6442-8343>, Papa, João P. and Yang, Xin-She ORCID logoORCID: <https://orcid.org/0000-0001-8231-5556> (2020) A nature-inspired feature selection approach based on hypercomplex information. Applied Soft Computing, 94 , 106453. ISSN 1568-4946 [Article] (doi:10.1016/j.asoc.2020.106453)

Final accepted version (with author's formatting)

This version is available at: <https://eprints.mdx.ac.uk/30351/>

Copyright:

Middlesex University Research Repository makes the University's research available electronically.

Copyright and moral rights to this work are retained by the author and/or other copyright owners unless otherwise stated. The work is supplied on the understanding that any use for commercial gain is strictly forbidden. A copy may be downloaded for personal, non-commercial, research or study without prior permission and without charge.

Works, including theses and research projects, may not be reproduced in any format or medium, or extensive quotations taken from them, or their content changed in any way, without first obtaining permission in writing from the copyright holder(s). They may not be sold or exploited commercially in any format or medium without the prior written permission of the copyright holder(s).

Full bibliographic details must be given when referring to, or quoting from full items including the author's name, the title of the work, publication details where relevant (place, publisher, date), pagination, and for theses or dissertations the awarding institution, the degree type awarded, and the date of the award.

If you believe that any material held in the repository infringes copyright law, please contact the Repository Team at Middlesex University via the following email address:

eprints@mdx.ac.uk

The item will be removed from the repository while any claim is being investigated.

See also repository copyright: re-use policy: <http://eprints.mdx.ac.uk/policies.html#copy>

A Nature-Inspired Feature Selection Approach based on Hypercomplex Information

Gustavo H. de Rosa^a, João P. Papa^a, Xin-She Yang^b

^a*Department of Computing, São Paulo State University, Av. Eng. Luiz Edmundo Carrijo Coube, 14-01, Bauru, SP, 17033-360, Brazil - Phone: +55-14 3103-6079*

gustavo.rosa@unesp.br, joao.papa@unesp.br

^b*School of Science and Technology, Middlesex University, NW 4 4BT, United Kingdom -*

Citation Details:

Applied Soft Computing, Volume 94, September 2020, Article 106453
<https://doi.org/10.1016/j.asoc.2020.106453>

Abstract

Feature selection for a given model can be transformed into an optimization task. The essential idea behind it is to find the most suitable subset of features according to some criterion. Nature-inspired optimization can mitigate this problem by producing compelling yet straightforward solutions when dealing with complicated fitness functions. Additionally, new mathematical representations, such as quaternions and octonions, are being used to handle higher-dimensional spaces. In this context, we are introducing a meta-heuristic optimization framework in a hypercomplex-based feature selection, where hypercomplex numbers are mapped to real-valued solutions and then transferred onto a boolean hypercube by a sigmoid function. The intended hypercomplex feature selection is tested for several meta-heuristic algorithms and hypercomplex representations, achieving results comparable to some state-of-the-art approaches. The good results achieved by the proposed approach make it a promising tool amongst feature selection research.

Keywords: Meta-heuristic optimization, Hypercomplex spaces, Feature selection

1. Introduction

Optimization techniques became more and more popular in the last few years. Beneficial in numerous applications, ranging from engineering [1, 2],

medicine [3, 4] to machine learning fine-tuning [5–8], they provide suitable solu-
5 tions and virtually none human interaction with the modeling process, leaving
the burden of choosing parameters to the model itself. In this context, most of
the obstacles described by non-convex mathematical functions [9] requires more
robust optimization approaches rather than conventional optimization methods.

Meta-heuristics algorithms, usually referred to as nature-inspired, or even
10 to swarm- or evolutionary-based algorithms, gained great attention in the last
years, attempting to solve optimization problems in a more appealing way than
traditional methods. These so-called nature techniques work without deriva-
tives, thus being suitable for problems with high dimensional spaces. Even
though they provide outstanding results in different applications, they can still
15 get trapped into local optimal points. Thus, an important question is how to
run these algorithms in the case of complex objective functions. One can refer to
hybrid variants [10], aging mechanisms [11], and fitness landscape analysis [12]
as some distinct strategies used to deal with this issue.

As mentioned above, the problem of selecting possible parameters can be
20 solved as an optimization problem, where a subset of parameters or features
can be used to calculate the value of a fitness function. This is similar to
feature selection, and it is usually classified into two divisions: (i) wrapper
approaches [13], and (ii) filter-based [14]. The former methods use the output of
some classifier (e.g., classification accuracy) to control the optimization method.
25 Conversely, filter-based ones do not consider this information.

One can presume that feature selection is a straightforward solution that
automatizes the choice of parameters. However, it is still necessary to select
an appropriate fitness function, which is regularly correlated to the problem’s
nature. Also, most machine learning problems deal with high-dimensional data,
30 thus amplifying the problem of exploring the search space. An intriguing way to
tackle this obstacle is to use a more complex representation of the search space,
the so-called hypercomplex search space. The goal behind handling hypercom-
plex spaces is based on the possibility of having more natural fitness landscapes,
although it has not been mathematically proved yet. Nevertheless, the results

35 achieved previously sustain such a hypothesis [15–18].

Normalized quaternions, also known as versors, are broadly used to describe the orientation of objects in three-dimensional spaces, being extremely efficient in performing rotations in such spaces [19]. Another intriguing addition of quaternions are the octonions, comprised of eight dimensions [20]. Even though
40 they are not well known in the literature, they have compelling traits that make them suitable for special relativity and quantum mechanics, among other research specialties [21, 22]. However, to the best of our knowledge, they have not been used to embed search spaces in meta-heuristic feature selection so far.

This study considers 8 meta-heuristic techniques, among with their quaternion-
45 and octonion-based versions, validated under 20 different datasets, proving the robustness of quaternionic and octatonic representations for hypercomplex-embedded search spaces. Therefore, we believe this paper can serve as a foundation for prospective research regarding hypercomplex representations in the context of meta-heuristic-based feature selection.

50 The rest of this paper is organized as follows. Sections 2 and 3 present the theoretical background related to hypercomplex-based spaces (quaternions and octonions), and the proposed approach for hypercomplex-based feature selection, respectively. Section 4 discusses the methodology and the computational setup adopted in this paper, while Section 5 presents the numerical results.
55 Finally, Section 6 states conclusions and future works.

2. Hypercomplex-based Spaces

2.1. Complex Numbers

The following problems can be solved with the modern methods of numerical analysis:

$$x^2 + 1 = 0, \tag{1}$$

60 in spite of the fact that $x^2 = -1$ cannot be a rational solution as any number square root must be positive, $x \in \mathbb{R}$.

The problem (1) can be solved using the imaginary representation:

$$i^2 = -1, \quad (2)$$

although this may not appear to be logically correct. The imaginary numbers assemble a structure called *complex numbers*, which is formed by real and imaginary terms, as follows:

$$c = h_0 + h_1 i, \quad (3)$$

where $h_0, h_1 \in \mathbb{R}$ and $i^2 = -1$. One can perceive that it is feasible to obtain a real number by using $h_1 = 0$, or even an imaginary number by placing $h_0 = 0$. Thus, the complex numbers deal with the generalization of both real and imaginary numbers.

One striking operation that performs positively well in a two-dimensional space is the rotation of complex numbers. Firstly, let us map a complex number on a two-dimensional grid, called *complex plane*, where the horizontal axis holds the real part mapping (**Re**), and the vertical axis is accountable for the imaginary part (**Im**). This description is depicted by Figure 1.

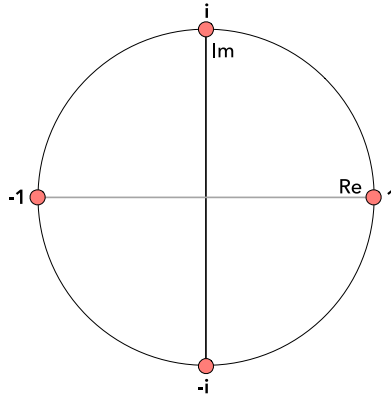


Figure 1: Representation of a complex plane, which is used to map complex numbers onto a two-dimensional space.

75 One can see that we need to multiply a complex number by i for each 90-degree rotation in the complex plane. To clarify this, let us consider a random point denoted by $r = i + 1$. Also, let x be the result of the multiplication of r by i , as follows:

$$x = ri = i + i^2 = -1 + i. \quad (4)$$

Now, we can obtain a singular y point by multiplying again x by i :

$$y = xi = -i + i^2 = -1 - i. \quad (5)$$

80 Moreover, if we multiply the result y by i , a w point can be achieved as follows:

$$w = yi = -i - i^2 = 1 - i. \quad (6)$$

Finally, by multiplying w with i , we conclude:

$$z = wi = i - i^2 = 1 + i, \quad (7)$$

where z is the same first defined position, i.e., $r = z$. Figure 2 illustrates the above calculations.

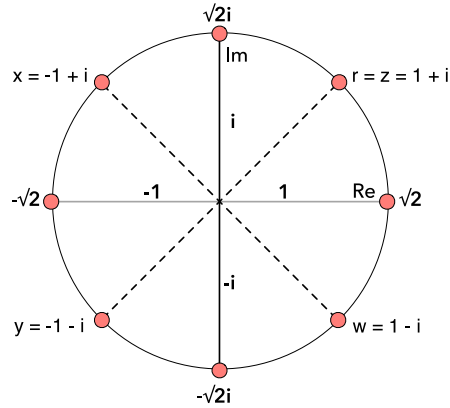


Figure 2: Representation of complex numbers' rotation throughout the complex plane.

85 2.2. Hypercomplex Numbers

In a particular behavior, we can extend the idea of complex numbers by adding new imaginary terms, producing the so-called hypercomplex numbers. This concept also allows rotations to be performed in higher-dimensional complex spaces. In this work, we consider two traditional hypercomplex representations: quaternions and octonions.

2.2.1. Quaternions

A quaternion q is a hypercomplex number, composed of real and complex parts, being $q = h_0 + h_1i + h_2j + h_3k$, where $h_0, h_1, h_2, h_3 \in \mathbb{R}$ and i, j, k are imaginary numbers (also known as “fundamental quaternions units”). This assumption is hold by the following set of equations:

$$ij = k, \tag{8}$$

$$jk = i, \tag{9}$$

$$ki = j, \tag{10}$$

$$ji = -k, \tag{11}$$

$$kj = -i, \tag{12}$$

$$ik = -j, \tag{13}$$

and

$$i^2 = j^2 = k^2 = -1. \tag{14}$$

Essentially, a quaternion q is a four-dimensional space representation over the real numbers, i.e., \mathbb{R}^4 .

Given two arbitrary quaternions $q_1 = g_0 + g_1i + g_2j + g_3k$ and $q_2 = h_0 + h_1i + h_2j + h_3k$, the quaternion algebra defines a set of main operations [23].

100 The addition operation, for instance, can be defined as follows:

$$\begin{aligned} q_1 + q_2 &= (g_0 + g_1i + g_2j + g_3k) + (h_0 + h_1i + h_2j + h_3k) \\ &= (g_0 + h_0) + (g_1 + h_1)i + (g_2 + h_2)j + (g_3 + h_3)k, \end{aligned} \quad (15)$$

while the subtraction is defined as follows:

$$\begin{aligned} q_1 - q_2 &= (g_0 + g_1i + g_2j + g_3k) - (h_0 + h_1i + h_2j + h_3k) \\ &= (g_0 - h_0) + (g_1 - h_1)i + (g_2 - h_2)j + (g_3 - h_3)k. \end{aligned} \quad (16)$$

Moreover, Fister et al. [15, 16] introduced two other operations, q_{rand} and q_{zero} . The former initializes a given quaternion with values drawn from a Gaussian distribution \mathcal{N} , and is defined as follows:

$$q_{\text{rand}}() = \{g_i = \mathcal{N}(0, 1) \mid i \in \{0, 1, 2, 3\}\}. \quad (17)$$

105 The latter equation initializes a quaternion with zero values, as follows:

$$q_{\text{zero}}() = \{g_i = 0 \mid i \in \{0, 1, 2, 3\}\}. \quad (18)$$

2.2.2. Octonions

Octonions are a natural extension of quaternions and were discovered autonomously by John T. Graves and Arthur Cayley around 1843. An octonion is composed of seven complex parts and one real-valued term, being defined as
110 follows:

$$o = h_0e_0 + h_1e_1 + h_2e_2 + \dots + h_7e_7, \quad (19)$$

where $h_i \in \mathbb{R}$ and e_i are the imaginary numbers, $i = 0, \dots, 7$. Commonly, $e_0 = 1$ is used in order to obtain the real-valued term of the octonion.

The addition, subtraction, and norm equations are computed likewise to the quaternions' formulae, giving us a clear implementation framework in order to
115 manipulate several hypercomplex representations.

3. Feature Selection

This section outlines the proposed method for meta-heuristic-based feature selection. One can understand the feature selection process as a method that decides whether a feature should be selected or not (boolean) in order to solve a
120 given problem. As traditional optimization algorithms use a continuous-valued search space, we need to shape the search space into an n -dimensional binary structure, where solutions are selected across the edges of a hypercube. Furthermore, as our problem is to select or not a feature, each solution individual is now an n -dimensional binary array, where each dimension corresponds to a
125 specific feature and the values 1 and 0 indicate whether this feature will or will not be part of the new set.

Concerning conventional optimization algorithms, the solutions are found upon continuous-valued positions of the search space. In order to accomplish this binary-valued individual, one can restrain the new solutions to binary values
130 only:

$$S(x_i^j) = \frac{1}{1 + e^{-x_i^j}}, \quad (20)$$

$$x_i^j = \begin{cases} 1 & \text{if } S(x_i^j) > \alpha, \\ 0 & \text{otherwise} \end{cases} \quad (21)$$

in which $\alpha \sim U(0, 1)$, and $\mathbf{x} \in \mathfrak{R}$ stands for a possible solution.

Equation 20 represents the *transfer function*, which maps real-valued solutions into binary-valued ones. Note that any transfer functions can be used to fulfill this purpose. In this work, we are using a sigmoid function (Equa-

tion 20), which is illustrated by Figure 3 to map bounded real-valued solutions¹ is bounded within the interval $[-20, 20]$. and generate a probability. Further, the mapped value is compared against a uniform distribution sampling in order to obtain the binary output (Equation 21).

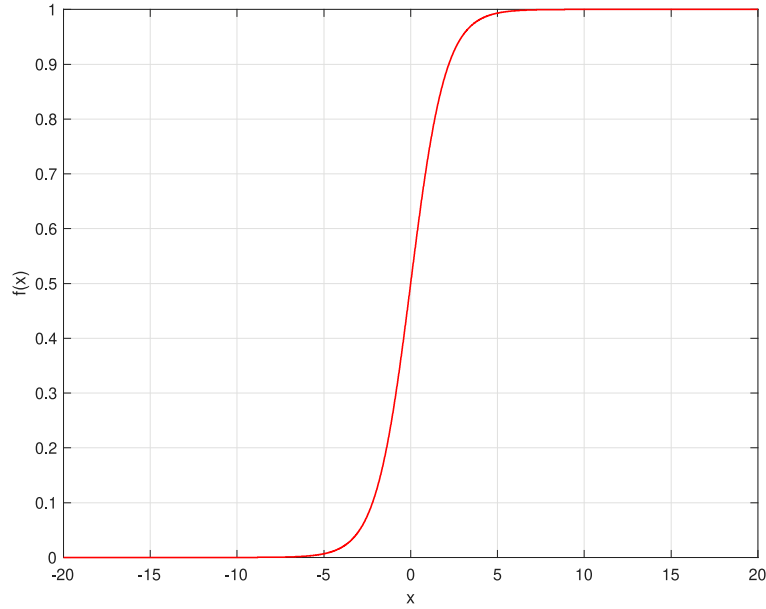


Figure 3: Sigmoid transfer function $f(x) = \frac{1}{1+e^{-x}}$ bounded in $[-20, 20]$.

3.1. Hypercomplex Feature Selection

A hypercomplex-based feature selection strategy does not deviate too much from the regular method. One can encode the common search space into a higher-dimensional space, by applying the power of quaternions or octonions. When conducting the meta-heuristic algorithm through the hypercomplex space towards a feasible solution, a crucial operator that needs to be defined is the p -norm, which is responsible for mapping hyper-complex values to real numbers.

¹Each real-valued solution

Let q be a hypercomplex number with real coefficients $\{h_d\}_{d=1}^D$, one can compute the Minkowski p -norm as follows:

$$\|q\|_p = \left(\sum_{d=1}^D |h_d|^p \right)^{1/p} \quad (22)$$

where D is the number of dimensions of the space (2 for complex numbers, 4 for quaternions and 8 for octonions, for instance) and $p \geq 1$. Common values for the latter variable are 1 or 2 for the Taxicab and Euclidean² norms, respectively. Hence, one can see the p -norm as a generalization of such distance operators.

Prior to the transfer function activation, there is an additional equation, called the Span function, which is responsible for mapping the norm's output between the lower and upper bounds, as follows:

$$q_{span}() = (b_u - b_l) \frac{\|q\|_p}{D^{1/p}} + b_l, \quad (23)$$

where b_l and b_u stands for the lower and upper bounds, respectively.

Figure 4 illustrates an encoding of a solution vector \mathbf{x} into a quaternionic space, where x_i^j depicts the i -th component of the hypercomplex number for the j -th decision variable. The same approach can be applied to octatonic spaces by extending the quaternion q (four components) to an octonion o (eight components).

4. Methodology and Setup

The idea behind this work is to model the task of selecting the most suitable features for a given problem through a meta-heuristic optimization process. As stated in Section 1, feature selection stands for a proper selection of features, reducing a particular problem's dimensionality and usually enhancing its performance. Also, as the proposed approach is a wrapper-based one, there is a need to define an objective function that will conduct the optimization process. Therefore, the proposed approach aims at selecting the subset of features

²In this work, we opted to use the Euclidean Norm as mapping function.

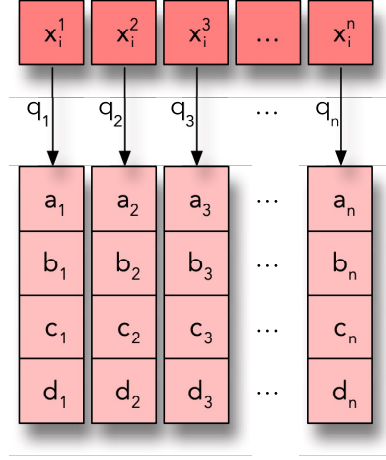


Figure 4: Quaternionic hypercomplex encoding of a solution vector \mathbf{x} , such that x_i^j stands for the i -th component of the hypercomplex number for the j -th decision variable.

that minimize the classification error (maximize the classification accuracy) of
 170 a given supervised classifier over a validation set. Although any supervised pattern recognition classifier could be applied, we opted to use the Optimum-Path Forest (OPF) [24, 25] since it is parameterless and has a fast training procedure. Essentially, the OPF encodes each dataset's sample as a node in a graph, whose connections are defined by an adjacency relation. Its learning process aims at
 175 finding prime samples called *prototypes* and trying to conquer the remaining samples by offering them optimum-paths according to a path-cost function. In the end, optimum-path trees are achieved, each one rooted at a different prototype node.

Given a set of hypercomplex candidate solutions $\{\mathbf{s}\}_{i=1}^S$, where $\mathbf{s} =$
 180 $\{s_1, s_2, \dots, s_j\} \mid j \in \{1, 2, \dots, N\}$, such that S stands for meta-heuristic candidates and N for the number of decision variables (number of the problem's features depicted in Table 1), we wish to learn the best set of features F^* .

Namely, we want to solve the following optimization problem:

$$\begin{aligned} F^* &= \{f_i(\mathbf{s}_i, F) \mid i \in [1, S]\}, \\ \text{st. } 1 \leq F \leq N. \end{aligned} \tag{24}$$

where $f_i(\mathbf{s}_i, F)$ stands for the fitness function (OPF accuracy over validation set) of candidate i based on its binary solution \mathbf{s}_i , which is responsible for activating or deactivating the set of features F . Finally, the meta-heuristic intrinsic mechanics³ are executed to identify the best solution so far and to update the candidates' position in the hypercomplex space.

4.1. Datasets

Table 1 describes all the datasets utilized in this work. We selected 20 datasets that diversify within the number of samples, classes, and features, suggesting a more strong validation under distinguished scenarios. The datasets were downloaded from LibSVM's project⁴ and Arizona State University's (ASU) repository⁵, being already quantized for categorical features and processed for missing values⁶. As we need a unique set to guide the optimization process, not being the test one, we partitioned all datasets' training sets in half, composing the so-called validation set. Therefore, we use 25% for the training step, 25% for the optimization task validation, and the remaining 50% to assess the experimental validation (testing step).

4.2. Computational Setup

The source code used in this work comes from two libraries: LibOPT⁷ and LibDEV⁸. Both libraries are implemented in the C language and have been extensively used throughout scientific research. The LibOPT library is a collection

³Note that some meta-heuristic might start their searching procedure with every possible initial features, while others might start with a randomly subset of the initial features.

⁴<https://www.csie.ntu.edu.tw/~cjlin/libsvmtools/datasets>

⁵<http://featureselection.asu.edu/datasets.php>

⁶One can find their post-processed versions at: <http://recogna.tech>

⁷<https://github.com/jppbsi/LibOPT>

⁸<https://github.com/jppbsi/LibDEV>

| Dataset | Task | # Training Samples | # Testing Samples | # Features |
|----------------|---------------------------|--------------------|-------------------|------------|
| Arcene | Mass Spectrometry | 100 | 100 | 10,000 |
| BASEHOCK | Text | 997 | 996 | 4,862 |
| COIL20 | Face Image | 770 | 770 | 1,024 |
| DNA | Biological | 2,000 | 1,186 | 180 |
| Isolet | Spoken Letter Recognition | 780 | 780 | 617 |
| Lung | Biological | 102 | 101 | 3,312 |
| Madelon | Artificial | 2,000 | 600 | 500 |
| MPEG7-BAS | Image Descriptor | 700 | 700 | 180 |
| MPEG7-Fourier | Image Descriptor | 700 | 700 | 126 |
| Mushrooms | Biological | 4,062 | 4,062 | 112 |
| NTL-Commercial | Energy Theft | 2,476 | 2,476 | 8 |
| NTL-Industrial | Energy Theft | 1,591 | 1,591 | 8 |
| ORL | Face Image | 200 | 200 | 1,024 |
| PCMAC | Text | 972 | 971 | 3,289 |
| Phishing | Network Security | 5,528 | 5,527 | 68 |
| Segment | Image Segmentation | 1,155 | 1,155 | 19 |
| Sonar | Signal | 104 | 104 | 60 |
| Splice | Biological | 1,000 | 2,175 | 60 |
| Vehicle | Image Silhouettes | 423 | 423 | 18 |
| Wine | Chemical | 89 | 89 | 13 |

Table 1: Employed datasets used in the computations

of meta-heuristic optimization techniques, while the LibDEV library provides
 205 an integration environment, e.g., feature selection conducted over meta-heuristic
 optimizations. One can refer to [26] in order to understand how it is possible
 to work under the LibOPT environment, i.e., how to design a hypercomplex
 optimization task.

To perform a reasonable comparison among distinct meta-heuristic tech-
 210 niques, we must rely on mathematical methods that will sustain these observa-
 tions. The first step is to decide whether to use a parametric or a non-parametric
 statistical test [27]. Unfortunately, we can not consider a normality state from
 our numerical trials due to the aleatory and non-deterministic factor derived
 from the meta-heuristic techniques, restraining our analysis to non-parametric
 215 approaches.

Secondly, acknowledging that the results of our numerical trials are indepen-
 dent (i.e., classification accuracy) and continuous over a particular dependent
 variable (i.e., number of observations), we can identify that the Wilcoxon signed-
 rank test [28] will satisfy our obligations. It is a non-parametric hypothesis test
 220 used to compare two or more related observations (in our case, repeated mea-
 surements over a certain meta-heuristic) to assess whether there are statistically
 significant differences between them.

For every dataset, each meta-heuristic was evaluated under a 2-fold cross-
 validation⁹ with 25 runs. Additionally, for every meta-heuristic, 15 agents (par-
 225 ticles) were used over 25 convergence iterations. To provide a thorough compar-
 ison between meta-heuristics, we have chosen different techniques, ranging from
 swarm-based to evolutionary-inspired ones, in the context of feature selection:

- Artificial Bee Colony (ABC) [29];
- Adaptive Inertia Weight Particle Swarm Optimization (AIWPSO) [30];
- 230 • Bat Algorithm (BA) [31];

⁹Remember that the training set was again split in half to form the validation set, used
 during the optimization process.

| Algorithm | Parameters |
|-----------|---|
| ABC | number of trials = 1,000 |
| AIWPSO | $c_1 = 1.7 \mid c_2 = 1.7 \mid w = [0.5, 1.5]$ |
| BA | $f = [0, 100] \mid A = 1.5 \mid r = 0.5$ |
| CS | $\beta = 1.5 \mid p = 0.25 \mid \alpha = 0.8$ |
| FA | $\alpha = 0.2 \mid \beta = 1.0 \mid \gamma = 1.0$ |
| FPA | $\beta = 1.5 \mid p = 0.8$ |
| PSO | $c_1 = 1.7 \mid c_2 = 1.7 \mid w = 0.7$ |

Table 2: Parameter settings for the meta-heuristic algorithms considered in the work.

- Cuckoo Search (CS) [32];
- Firefly Algorithm (FA) [33];
- Flower Pollination Algorithm (FPA) [34];
- Particle Swarm Optimization (PSO) [35].

235 Note that, for each selected meta-heuristic, we will also present their quaternion-
and octonion-based versions, being the former preceded by a Q prefix and the
latter preceded by an O prefix. Table 2 presents the chosen parameter setting
for every meta-heuristic technique¹⁰. We overlooked quaternion- and octonion-
based algorithms from the table, as their parameters are the same as their
240 original version.

Concerning ABC, we only need to set the number of trial limits for each
food source. AIWPSO defines minimum and maximum weight as a w interval,
and c_1 and c_2 as the control parameters. BA has the minimum and maximum

¹⁰Note that these values were empirically chosen according to their authors' definition.

frequency ranges defined by f interval, as well as the loudness parameter A and
245 pulse rate r . With CS, we demand to set up β , which is used to compute the Lévy
distribution, as well as p , which is the probability of replacing worst nests by new
ones and α which is the step size. Regarding FA, we have α for calculating the
randomized parameter, as well as the attractiveness parameter β_0 and the light
absorption coefficient γ . FPA requires the β parameter, used to compute the
250 Lévy distribution and p , which is the probability of local pollination. Finally,
PSO defines w as the inertia weight, and c_1 and c_2 as the control parameters.

5. Numerical Results

This section presents the numerical results concerning the proposed experi-
ments. Furthermore, it is divided into two subsections, which are in charge of
255 discussing the overall analysis and the convergence analysis, respectively.

In order to provide statistical analysis to the numerical results, we opted
to bold the best results' cells according to the Wilcoxon signed-rank test with
5% of significance. In other words, it is possible to observe that, regarding a
particular column, every bolded cell achieved the most suitable accuracy, time,
260 or number of features according to the statistical test.

5.1. Overall Analysis

Table 3 describes all datasets' average accuracy over the test set found by
each meta-heuristic technique. A very interesting fact to highlight is that for
almost every dataset, at least one meta-heuristic technique was able to achieve
265 a performance comparable to the baseline approach, i.e., OPF classification us-
ing the whole dataset. On the other hand, considering Arcene, Mushrooms,
NTL-Commercial, NTL-Industrial, and Splice datasets, meta-heuristic tech-
niques outperformed the baseline approach.

Regarding only meta-heuristic techniques and their hypercomplex versions,
270 one can see that the hypercomplex-based algorithms were able to achieve com-
parable accuracy values. In some cases, they even outperformed their naïve ver-
sions, e.g., QFA, QFPA, OFPA, and QPSO on Arcene; QAIWPSO on COIL20;

QAIWPSO on Madelon; QCS, QFPA, and OFPA in Mushrooms; QABC and OABC in ORL; QABC, QBA, and OBA in PCMAC; QABC, OABC, OAIW-
275 PSO, QFA, OFA, QFPA and OFPA in Phishing; OABC and QPSO in Splice; QCS and OCS in Wine. In such case, outperforming means that a particular technique was capable of achieving a higher accuracy than another technique. Essentially, the Wilcoxon signed-rank test assess whether there was a statistical similarity between the accuracies obtained by each one of the techniques. Thus, as the statistical test was conducted over the independent accuracies for
280 each meta-heuristic technique, it is possible to observe that the most significant techniques (bolded ones) in the aforementioned cases were also the ones that achieved higher accuracy than their naïve versions.

| | ABC | QABC | OABC | AIWPSO | QAIWPSO | OAIWPSO | BA | QBA | OBA | CS | QCS | OCS | FA | QFA | OFA | FPA | QFPA | OFPA | PSO | QPSO | OPSO | BASELINE |
|----------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Arcene | 83.13% | 83.04% | 83.13% | 83.50% | 82.89% | 82.52% | 82.83% | 82.72% | 82.61% | 82.41% | 82.38% | 82.75% | 82.70% | 83.04% | 82.55% | 82.72% | 82.90% | 82.92% | 82.26% | 83.21% | 82.47% | 81.58% |
| BASEHOCK | 79.49% | 79.07% | 79.98% | 79.67% | 79.86% | 78.84% | 79.99% | 79.58% | 79.73% | 80.14% | 78.87% | 79.83% | 79.25% | 79.99% | 79.62% | 79.80% | 79.00% | 79.02% | 79.63% | 79.59% | 80.13% | 82.12% |
| COIL20 | 99.04% | 99.09% | 99.03% | 99.02% | 99.13% | 99.07% | 99.09% | 99.08% | 99.08% | 99.12% | 99.09% | 99.07% | 99.08% | 99.06% | 99.09% | 99.09% | 99.04% | 99.10% | 99.13% | 99.07% | 99.04% | 99.30% |
| DNA | 79.43% | 79.58% | 79.17% | 78.95% | 78.70% | 78.64% | 79.08% | 79.32% | 77.55% | 77.90% | 77.49% | 78.06% | 78.69% | 79.23% | 78.97% | 79.17% | 79.30% | 79.30% | 79.51% | 78.71% | 79.26% | 82.33% |
| Isolet | 90.79% | 90.81% | 90.72% | 90.89% | 90.77% | 90.83% | 90.55% | 90.71% | 90.77% | 90.57% | 90.71% | 90.70% | 90.68% | 90.89% | 90.73% | 90.77% | 90.67% | 90.69% | 90.67% | 90.71% | 90.66% | 91.30% |
| Lung | 93.08% | 93.13% | 92.68% | 91.95% | 92.43% | 92.26% | 92.61% | 92.66% | 92.77% | 92.20% | 92.47% | 92.56% | 92.70% | 92.54% | 92.49% | 92.88% | 92.71% | 92.87% | 92.83% | 91.89% | 92.51% | 93.24% |
| Madelon | 63.42% | 62.69% | 63.00% | 62.73% | 64.52% | 63.21% | 63.85% | 62.25% | 65.12% | 63.48% | 62.69% | 63.63% | 63.94% | 63.23% | 62.79% | 62.81% | 63.70% | 63.41% | 62.87% | 63.03% | 62.47% | 64.37% |
| MPEG7-BAS | 88.78% | 88.85% | 88.90% | 88.91% | 88.90% | 88.90% | 88.80% | 88.98% | 88.81% | 88.92% | 88.97% | 88.81% | 88.89% | 88.99% | 88.83% | 88.81% | 88.85% | 88.81% | 88.90% | 88.96% | 88.88% | 89.11% |
| MPEG7-Fourier | 72.12% | 71.94% | 72.00% | 71.91% | 71.91% | 72.18% | 72.19% | 72.06% | 72.18% | 69.46% | 70.00% | 70.49% | 71.78% | 71.86% | 71.96% | 72.02% | 72.19% | 72.16% | 72.12% | 72.22% | 72.14% | 72.09% |
| Mushrooms | 96.19% | 96.57% | 98.81% | 96.61% | 97.63% | 97.43% | 95.81% | 96.61% | 94.04% | 97.11% | 97.40% | 94.62% | 96.90% | 94.80% | 96.31% | 94.14% | 95.68% | 97.09% | 96.09% | 95.39% | 96.09% | 94.36% |
| NTL-Commercial | 92.73% | 92.59% | 92.16% | 91.84% | 90.78% | 92.39% | 92.42% | 92.17% | 91.93% | 79.22% | 76.07% | 79.99% | 91.71% | 91.99% | 92.05% | 92.17% | 92.39% | 91.76% | 92.52% | 92.57% | 91.93% | 61.45% |
| NTL-Industrial | 95.77% | 95.36% | 95.31% | 95.40% | 95.37% | 95.42% | 95.58% | 95.04% | 95.22% | 77.90% | 82.95% | 79.16% | 94.80% | 95.82% | 94.64% | 95.05% | 94.79% | 94.77% | 94.99% | 94.84% | 94.54% | 67.86% |
| ORL | 93.56% | 93.75% | 93.60% | 93.67% | 93.54% | 93.46% | 93.57% | 93.84% | 93.57% | 93.62% | 93.60% | 93.53% | 93.58% | 93.60% | 93.69% | 93.66% | 93.56% | 93.72% | 93.75% | 93.57% | 93.49% | 93.25% |
| PCMAC | 71.97% | 72.24% | 71.35% | 72.44% | 71.16% | 71.58% | 71.18% | 71.83% | 73.18% | 72.03% | 72.32% | 71.98% | 71.99% | 71.50% | 72.19% | 72.78% | 72.54% | 72.36% | 71.81% | 71.64% | 72.35% | 72.75% |
| Phishing | 84.53% | 85.36% | 86.56% | 84.74% | 84.02% | 85.99% | 84.92% | 85.49% | 84.76% | 85.40% | 84.90% | 84.06% | 83.35% | 85.26% | 85.19% | 84.40% | 84.40% | 85.61% | 84.79% | 84.10% | 85.93% | 86.67% |
| Segment | 97.33% | 97.19% | 97.25% | 97.15% | 97.05% | 97.20% | 97.19% | 97.20% | 97.06% | 96.22% | 96.35% | 95.95% | 97.29% | 96.82% | 97.21% | 97.13% | 97.20% | 97.19% | 97.17% | 97.31% | 96.83% | 97.34% |
| Sonar | 79.40% | 81.72% | 79.57% | 81.21% | 81.56% | 79.89% | 81.20% | 80.15% | 80.62% | 80.44% | 80.94% | 80.76% | 80.32% | 80.20% | 80.76% | 79.80% | 80.53% | 80.80% | 80.78% | 80.14% | 80.77% | 81.75% |
| Splice | 71.64% | 71.33% | 71.99% | 71.87% | 71.72% | 70.99% | 70.93% | 71.14% | 71.32% | 69.53% | 69.56% | 70.21% | 71.32% | 71.33% | 71.50% | 72.30% | 71.83% | 71.08% | 70.81% | 71.68% | 71.35% | 70.89% |
| Vehicle | 78.17% | 77.41% | 77.62% | 77.11% | 77.25% | 77.42% | 77.60% | 77.51% | 76.98% | 76.74% | 76.20% | 76.34% | 77.25% | 76.79% | 77.11% | 77.46% | 77.09% | 77.71% | 76.93% | 76.53% | 76.85% | 77.63% |
| Wine | 96.21% | 96.46% | 96.58% | 95.94% | 95.62% | 95.96% | 96.67% | 96.63% | 96.23% | 94.87% | 95.51% | 95.55% | 96.42% | 96.22% | 95.99% | 96.16% | 96.09% | 95.81% | 96.23% | 96.39% | 95.98% | 95.80% |

Table 3: Average accuracy achieved over the test set considering all datasets.

An interesting fact emerging from Table 4 is that CS was able to achieve the
285 lowest number of features in nearly every dataset. Furthermore, when standard
CS did not deliver the lowest number of features, its quaternionic and octatonic
representations were able to achieve this intent¹¹.

Even though most algorithms were able to diminish the features' space size
and obtain statistically similar accuracy within respect to the baseline method,
290 in some cases they reached a slightly lower accuracy than the original OPF
classification. However, it should be noted that in the case of the BASEHOCK
dataset, where even the baseline classification obtained the best accuracy, all
other meta-heuristic techniques could reduce by about 35% of the number of
features while scoring 2-3% lower accuracy than OPF.

295 Table 5 shows that CS-based techniques completed the optimization runs in
a significantly lower computation time than every other technique. Addition-
ally, Figures 5 and 6 illustrate a more in-depth comparison between CS and
its hypercomplex versions for four distinct datasets: DNA, NTL-Commercial,
Phishing and Segment. One can observe that Figure 5 represents the CS-based
300 techniques behavior, where the best techniques are positioned in the top-left
corner of the graphic, i.e., best accuracy and lowest number of features. For
the sake of brevity, we opted to show some datasets that have discrepant data,
i.e., datasets that have a low amount of features, being more susceptible when
selecting a subset of features. In such cases, any incorrect feature selection will
305 depreciate the classification results, thus, making the convergence process more
unstable.

One can perceive that CS-based techniques encountered a feasible number
of features, but not necessarily the best accuracy. If one observes the differ-
ence between the best and the worst accuracy considering all datasets (except
310 NTL-based ones) and meta-heuristic techniques, there is not a single one that
surpasses the 4.77% barrier. Nevertheless, CS suffered in the NTL datasets

¹¹QCS achieved the lowest number of features for the Phishing dataset while OCS achieved
this goal for the DNA, NTL-Commercial and Segment datasets.

| | ABC | QABC | OABC | AIWPSO | QAIWPSO | OAIWPSO | BA | QBA | OBA | CS | QCS | OCS | FA | QFA | OFA | FPA | QFPA | OFPA | PSO | QPSO | OPSO | BASELINE |
|----------------|---------|---------------|---------|----------------|--------------|---------|---------|---------|---------|----------------|--------------|---------------|--------------|-------------|---------|---------|---------|---------|---------|---------|---------|----------|
| Arcene | 6462.88 | 6473.48 | 6482.36 | 6454.20 | 6492.80 | 6467.04 | 6476.72 | 6486.52 | 6512.96 | 6419.40 | 6453.76 | 6478.40 | 6466.00 | 6471.68 | 6491.80 | 6471.56 | 6481.52 | 6479.60 | 6450.84 | 6468.56 | 6505.52 | 10000.00 |
| BASEHOCK | 3166.92 | 3141.28 | 3142.16 | 3148.48 | 3149.76 | 3153.28 | 3167.52 | 3167.60 | 3170.32 | 3124.72 | 3143.72 | 3139.64 | 3152.16 | 3146.40 | 3156.52 | 3151.52 | 3131.08 | 3135.00 | 3149.40 | 3147.32 | 3147.68 | 4862.00 |
| COIL20 | 670.04 | 666.16 | 663.92 | 658.92 | 664.12 | 668.84 | 667.56 | 668.28 | 674.88 | 654.52 | 660.52 | 664.56 | 666.12 | 664.44 | 667.00 | 663.56 | 664.08 | 666.44 | 664.40 | 666.80 | 666.88 | 1024.00 |
| DNA | 117.04 | 117.48 | 116.44 | 117.20 | 116.80 | 117.88 | 119.96 | 116.92 | 116.72 | 118.04 | 116.36 | 113.00 | 117.84 | 116.40 | 115.96 | 119.04 | 117.96 | 119.00 | 115.00 | 116.28 | 117.00 | 180.00 |
| Isolet | 407.08 | 401.12 | 398.16 | 396.24 | 399.12 | 401.08 | 399.48 | 403.36 | 408.84 | 393.40 | 398.64 | 401.40 | 402.52 | 397.88 | 399.76 | 402.20 | 397.68 | 400.32 | 397.24 | 397.88 | 399.72 | 617.00 |
| Lung | 2138.28 | 2132.52 | 2135.64 | 2125.32 | 2143.64 | 2147.60 | 2148.08 | 2151.12 | 2148.36 | 2130.36 | 2144.88 | 2143.84 | 2150.40 | 2143.88 | 2143.64 | 2136.52 | 2141.64 | 2147.96 | 2134.40 | 2145.24 | 2141.92 | 3312.00 |
| Madelon | 324.72 | 321.72 | 324.40 | 321.96 | 322.44 | 324.44 | 324.00 | 327.44 | 330.36 | 325.16 | 324.24 | 324.44 | 325.84 | 328.80 | 323.16 | 324.68 | 323.48 | 327.56 | 324.64 | 323.92 | 324.00 | 500.00 |
| MPEG7-BAS | 118.12 | 120.80 | 119.00 | 118.40 | 120.12 | 119.84 | 118.56 | 121.52 | 120.44 | 115.88 | 116.84 | 116.80 | 120.92 | 117.68 | 119.20 | 118.32 | 118.92 | 117.88 | 117.88 | 118.52 | 119.44 | 180.00 |
| MPEG7-Fourier | 81.08 | 82.08 | 81.88 | 82.52 | 81.04 | 82.36 | 84.36 | 84.40 | 83.08 | 81.12 | 81.48 | 82.64 | 82.64 | 82.92 | 81.24 | 82.36 | 82.84 | 83.04 | 83.88 | 82.44 | 81.32 | 126.00 |
| Mushrooms | 74.92 | 70.36 | 70.56 | 72.48 | 74.04 | 73.28 | 73.44 | 72.88 | 72.84 | 70.32 | 73.08 | 71.76 | 74.96 | 72.16 | 73.12 | 75.24 | 74.12 | 70.52 | 73.08 | 73.28 | 73.84 | 112.00 |
| NTL-Commercial | 5.72 | 5.60 | 5.60 | 5.84 | 5.76 | 5.76 | 5.68 | 5.76 | 5.56 | 5.04 | 5.04 | 4.84 | 5.68 | 5.72 | 5.44 | 5.64 | 5.68 | 5.64 | 5.68 | 5.48 | 5.44 | 8.00 |
| NTL-Industrial | 5.40 | 5.24 | 5.52 | 5.24 | 5.36 | 5.44 | 5.68 | 5.80 | 5.44 | 5.76 | 5.20 | 5.08 | 5.56 | 5.00 | 5.40 | 5.20 | 5.20 | 5.32 | 5.52 | 5.64 | 5.44 | 8.00 |
| ORL | 665.76 | 656.96 | 659.96 | 662.96 | 663.28 | 663.88 | 666.48 | 665.48 | 671.24 | 653.92 | 661.00 | 659.84 | 664.72 | 658.40 | 665.56 | 662.84 | 657.80 | 662.80 | 658.16 | 660.76 | 659.16 | 1024.00 |
| PCMAC | 2152.68 | 2114.28 | 2130.60 | 2132.16 | 2123.76 | 2128.32 | 2140.04 | 2137.88 | 2154.60 | 2112.16 | 2115.40 | 2123.12 | 2129.24 | 2126.48 | 2130.44 | 2135.56 | 2128.88 | 2130.92 | 2128.48 | 2126.76 | 2131.52 | 3289.00 |
| Phishing | 45.16 | 44.68 | 45.60 | 44.52 | 44.84 | 46.36 | 45.28 | 45.12 | 44.88 | 44.40 | 44.12 | 44.88 | 44.92 | 45.44 | 46.60 | 44.80 | 46.44 | 45.40 | 45.12 | 44.80 | 46.48 | 68.00 |
| Segment | 14.04 | 13.20 | 13.48 | 13.44 | 13.44 | 13.80 | 13.44 | 13.84 | 13.64 | 13.04 | 13.24 | 12.40 | 13.32 | 13.48 | 14.08 | 13.68 | 13.04 | 13.44 | 13.56 | 13.92 | 13.44 | 19.00 |
| Sonar | 40.24 | 39.40 | 38.80 | 39.00 | 39.76 | 40.84 | 40.04 | 37.96 | 39.12 | 39.52 | 39.64 | 39.48 | 37.92 | 38.24 | 40.28 | 39.76 | 39.08 | 40.32 | 39.48 | 38.24 | 39.96 | 60.00 |
| Splice | 40.48 | 39.72 | 39.72 | 40.68 | 40.24 | 40.28 | 40.56 | 38.80 | 40.64 | 38.76 | 39.40 | 40.04 | 39.28 | 40.40 | 40.92 | 40.40 | 39.92 | 40.48 | 40.04 | 40.44 | 39.80 | 60.00 |
| Vehicle | 13.40 | 12.68 | 12.72 | 12.84 | 12.00 | 12.28 | 12.60 | 12.96 | 13.40 | 11.92 | 12.20 | 12.08 | 12.84 | 12.72 | 13.00 | 13.08 | 13.28 | 12.76 | 13.52 | 12.52 | 13.16 | 18.00 |
| Wine | 9.20 | 9.04 | 9.24 | 8.40 | 9.04 | 9.12 | 9.28 | 9.00 | 9.56 | 9.04 | 8.80 | 8.88 | 9.04 | 9.08 | 9.48 | 9.00 | 9.32 | 8.76 | 9.28 | 8.92 | 9.48 | 13.00 |

Table 4: Average number of features used over the test set considering all datasets.

(energy theft identification), which are highly unbalanced and have a relatively small amount of features. As CS encountered the lowest number of features in such a low-dimensional dataset, it is possible to observe that is has overfitted the optimization process to find the lowest number of possible features at the cost of penalizing the classifier, hence, achieving a not suitable accuracy for these particular datasets.


Regarding the hypercomplex techniques, such as quaternion and octonion, it is possible to observe that they have an extra computational loop per feature, due to its number of dimensions, e.g., 4 and 8. If the number of selected features is sufficiently smaller to overcome this extra loop, the hypercomplex techniques

| | ABC | QABC | OABC | AIWPSO | QAIWPSO | OAIWPSO | BA | QBA | OBA | CS | QCS | OCS | FA | QFA | OFA | FPA | QFPA | OFPA | PSO | QPSO | OPSO |
|----------------|----------|----------|----------|---------|---------|---------|---------|---------|---------|----------------|--------------|---------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Arcene | 43.48s | 42.11s | 43.06s | 21.59s | 23.08s | 23.45s | 21.92s | 23.97s | 25.78s | 7.81s | 10.06s | 11.68s | 22.90s | 27.62s | 34.57s | 22.59s | 27.62s | 31.83s | 22.21s | 22.70s | 23.42s |
| BASEHOCK | 1114.33s | 1105.60s | 1108.30s | 563.38s | 563.89s | 566.88s | 568.81s | 571.82s | 571.79s | 189.89s | 203.89s | 203.53s | 545.73s | 543.84s | 547.47s | 564.81s | 565.72s | 567.54s | 556.54s | 558.63s | 561.71s |
| COIL20 | 179.37s | 181.11s | 181.33s | 90.92s | 93.17s | 93.01s | 90.47s | 92.77s | 94.90s | 30.19s | 33.10s | 33.57s | 89.41s | 88.91s | 90.34s | 92.62s | 92.79s | 94.25s | 90.70s | 91.86s | 91.87s |
| DNA | 240.43s | 241.94s | 242.54s | 171.38s | 171.86s | 171.85s | 124.60s | 123.88s | 123.78s | 45.01s | 46.74s | 46.34s | 121.66s | 122.14s | 122.58s | 123.84s | 125.02s | 124.48s | 171.20s | 171.06s | 169.50s |
| Isolet | 135.52s | 138.87s | 138.42s | 69.96s | 70.40s | 70.60s | 69.60s | 71.11s | 71.01s | 21.85s | 25.73s | 26.05s | 68.44s | 68.02s | 69.73s | 70.96s | 71.09s | 70.74s | 68.78s | 69.86s | 69.86s |
| Lung | 15.19s | 15.07s | 15.50s | 7.84s | 8.12s | 8.42s | 7.73s | 8.60s | 9.01s | 2.76s | 3.61s | 4.17s | 7.98s | 9.61s | 11.74s | 7.98s | 9.87s | 11.24s | 7.71s | 7.78s | 8.05s |
| Madelon | 704.37s | 698.42s | 698.56s | 354.86s | 356.56s | 357.16s | 358.11s | 359.54s | 361.50s | 120.80s | 127.19s | 128.23s | 343.79s | 341.46s | 343.17s | 355.31s | 353.68s | 354.26s | 351.40s | 352.89s | 352.85s |
| MPEG7-BAS | 38.05s | 35.59s | 37.25s | 25.01s | 25.71s | 25.25s | 18.78s | 18.46s | 18.67s | 6.61s | 7.29s | 7.39s | 18.96s | 19.36s | 19.17s | 19.51s | 18.89s | 19.64s | 25.40s | 25.16s | 25.06s |
| MPEG7-Fourier | 27.92s | 25.70s | 25.78s | 19.29s | 19.54s | 19.46s | 13.74s | 13.87s | 13.97s | 4.68s | 5.00s | 5.02s | 13.31s | 13.33s | 13.25s | 13.37s | 13.17s | 13.26s | 18.91s | 18.69s | 18.87s |
| Mushrooms | 791.66s | 785.72s | 785.15s | 600.75s | 600.03s | 601.13s | 405.80s | 408.04s | 409.10s | 143.20s | 151.30s | 152.22s | 398.83s | 397.73s | 398.85s | 404.05s | 403.06s | 404.90s | 597.34s | 596.48s | 595.58s |
| NTL-Commercial | 272.72s | 271.35s | 270.80s | 139.44s | 138.38s | 138.36s | 139.15s | 138.73s | 138.41s | 50.04s | 49.76s | 49.56s | 132.70s | 133.49s | 133.30s | 138.46s | 137.85s | 138.23s | 138.58s | 137.60s | 137.83s |
| NTL-Industrial | 113.70s | 111.91s | 111.74s | 57.60s | 56.71s | 56.55s | 57.79s | 57.30s | 57.27s | 20.58s | 20.62s | 20.55s | 54.88s | 54.97s | 54.58s | 57.11s | 57.30s | 57.02s | 57.68s | 56.60s | 56.46s |
| ORL | 13.07s | 13.05s | 13.08s | 6.73s | 6.77s | 6.93s | 6.38s | 6.96s | 7.20s | 2.07s | 2.62s | 2.82s | 6.67s | 7.56s | 8.63s | 6.87s | 7.19s | 7.67s | 6.64s | 6.79s | 6.80s |
| PCMAC | 751.25s | 742.09s | 744.23s | 377.87s | 381.31s | 380.74s | 382.81s | 382.50s | 386.86s | 128.28s | 136.87s | 137.31s | 365.66s | 366.69s | 370.00s | 380.84s | 382.02s | 381.16s | 374.06s | 376.45s | 377.26s |
| Phishing | 1119.79s | 1110.41s | 1110.58s | 943.66s | 941.99s | 939.85s | 576.86s | 578.64s | 578.91s | 206.02s | 218.22s | 218.06s | 569.57s | 567.55s | 567.86s | 574.09s | 572.32s | 573.75s | 936.62s | 933.18s | 932.34s |
| Segment | 72.41s | 72.66s | 72.15s | 36.87s | 36.99s | 36.63s | 37.23s | 37.26s | 37.11s | 13.02s | 13.43s | 13.53s | 35.18s | 35.53s | 35.46s | 36.98s | 37.02s | 36.75s | 37.25s | 36.33s | 36.58s |
| Sonar | 0.51s | 0.53s | 0.53s | 0.40s | 0.41s | 0.41s | 0.27s | 0.28s | 0.29s | 0.10s | 0.11s | 0.13s | 0.28s | 0.34s | 0.41s | 0.28s | 0.31s | 0.33s | 0.40s | 0.40s | 0.41s |
| Splice | 37.29s | 34.84s | 34.96s | 30.49s | 30.29s | 29.83s | 18.24s | 18.19s | 18.50s | 6.94s | 6.91s | 6.99s | 17.79s | 17.92s | 17.83s | 18.33s | 18.41s | 18.75s | 31.50s | 30.83s | 29.60s |
| Vehicle | 10.01s | 9.82s | 9.71s | 4.90s | 4.93s | 4.96s | 4.96s | 5.00s | 5.04s | 1.77s | 1.79s | 1.82s | 4.86s | 4.86s | 4.89s | 5.00s | 5.04s | 5.07s | 5.02s | 4.98s | 4.96s |
| Wine | 0.44s | 0.44s | 0.44s | 0.22s | 0.23s | 0.23s | 0.22s | 0.23s | 0.23s | 0.08s | 0.08s | 0.09s | 0.22s | 0.23s | 0.25s | 0.23s | 0.23s | 0.24s | 0.22s | 0.22s | 0.22s |


Table 5: Average computation time required by the optimization process considering all datasets.

will achieve a shorter computational time than the conventional ones. For example, in a 100-features problem, the conventional technique loop lasts for 100 times, while the quaternion and octonion loops last for 400 and 800 times, respectively. If the quaternion-based technique selects 25 features averagely while the octonion-based one selects 12.5 features averagely, both will perform a loop that lasts for 100 times, being comparable to the conventional algorithm.


The results obtained in this study prove the promising use of meta-heuristic optimization techniques when selecting a quasi-optimum subset of features while preserving its performance and discriminative aptitudes.

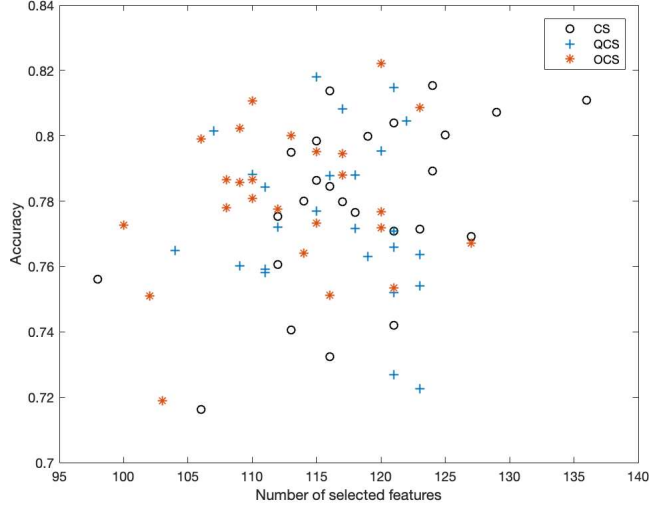


(a)

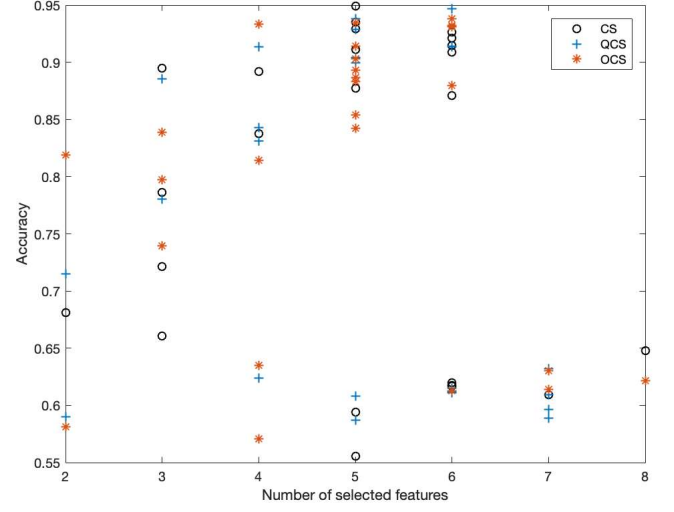

(b)

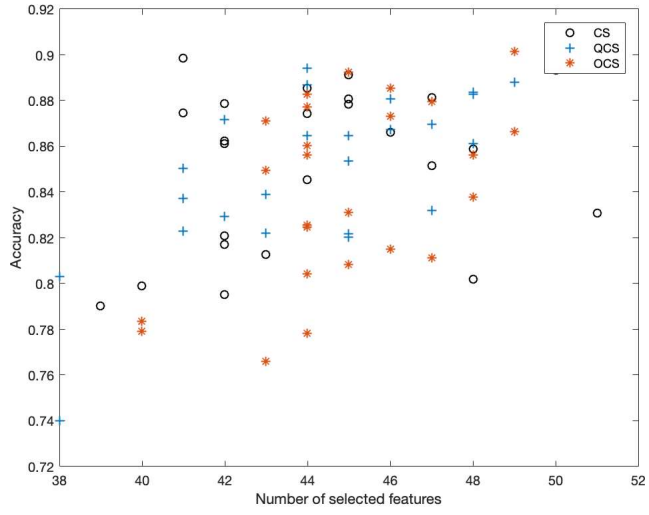


(c)

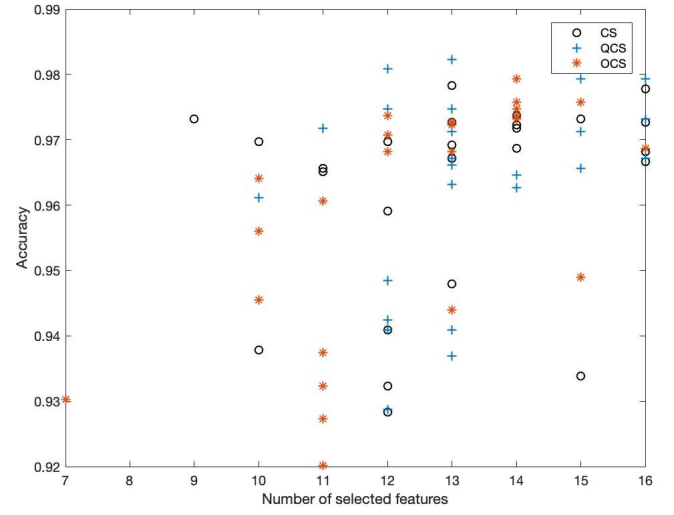


(d)


Figure 5: Number of selected features x Accuracy ([0,1]) chart considering CS, QCS and OCS in: (a) DNA, (b) NTL-Commercial, (c) Phishing and (d) Segment datasets.

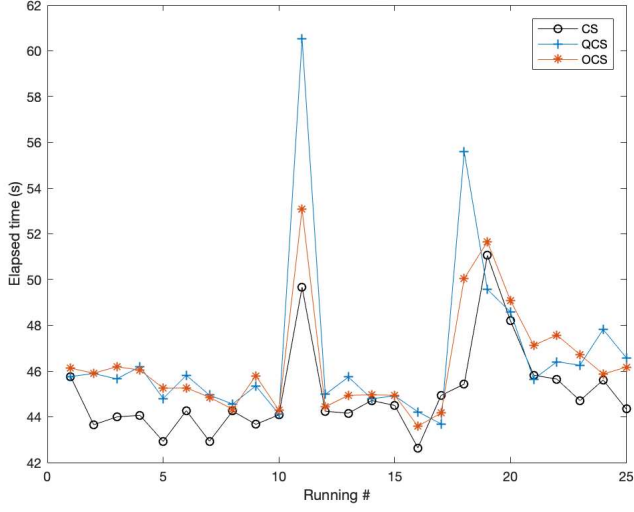


(a)

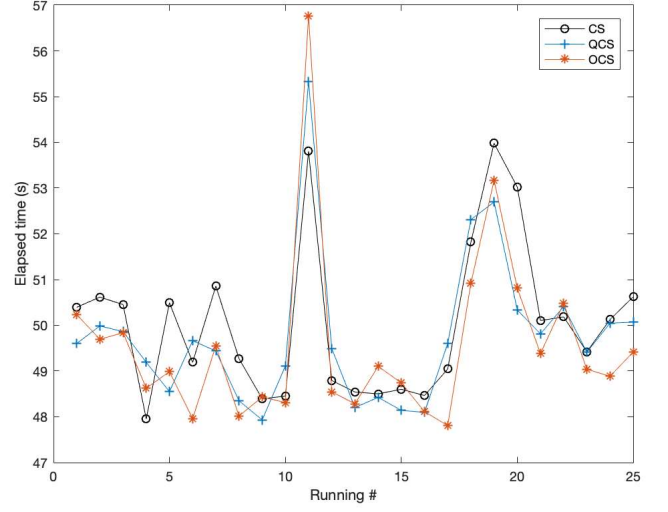

(b)

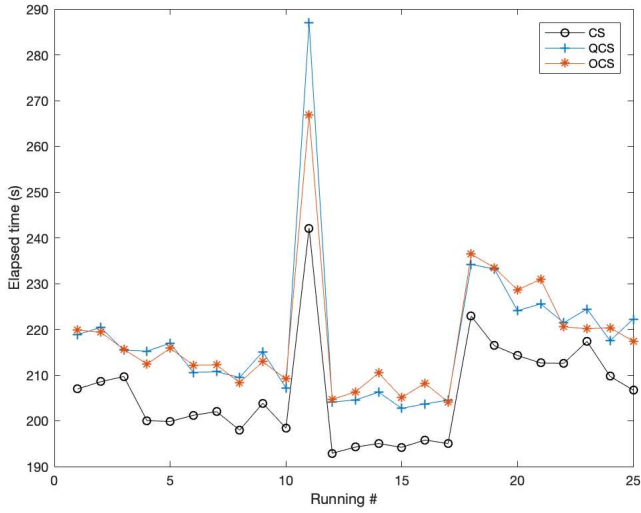

(c)

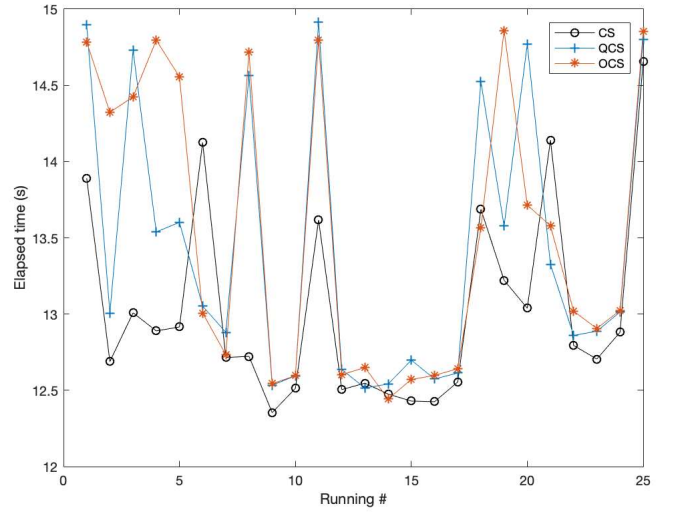

(d)

Figure 6: Computation time (s) for each independent run of CS, QCS and OCS in: (a) DNA, (b) NTL-Commercial, (c) Phishing and (d) Segment datasets.

5.2. Convergence Analysis

The convergence curves of CS and its variants obtained for the DNA, NTL-Commercial, Phishing, and Segment datasets are shown in Figure 7.


An interesting fact that one can perceive is that hypercomplex-based techniques were able to converge faster and better than the standard version in three out of four datasets (DNA, Phishing, and Segment). Additionally, it is essential to highlight that as hypercomplex-based algorithms use an enhanced version of the search space, i.e., a space with a more substantial amount of possible values, they are capable of better exploring it, thus, leading to better convergence rates and fitness values. Moreover, as OCS encodes a higher-dimensional space, i.e., 8 dimensions, it was able to achieve the lowest fitness for two datasets (Phishing and Segment), thus showing its exploration capability of the search space.

6. Conclusion


This paper addressed the problem of feature selection through a meta-heuristic optimization approach. A wide range of meta-heuristic techniques was employed in 20 distinct datasets in order to provide a more thoughtful numerical validation of the proposed computational framework. Additionally, we also present three distinct search spaces for each optimization technique: standard, quaternionic, and octatonic.

In most circumstances, the meta-heuristic techniques were able to outperform the baseline approach (OPF classification over the full-features dataset). In such cases, outperforming means that a singular technique was able to attain higher accuracy than another algorithm, according to the Wilcoxon signed-rank test with 5% of significance. Besides, it is possible to highlight that all meta-heuristic techniques were able to diminish a substantial number of the initial datasets' features while maintaining their classification accuracy.


Even though most algorithms were able to reduce the features' space size and obtain statistically similar accuracy within respect to the baseline method, in some cases, they reached a slightly lower accuracy than the original OPF

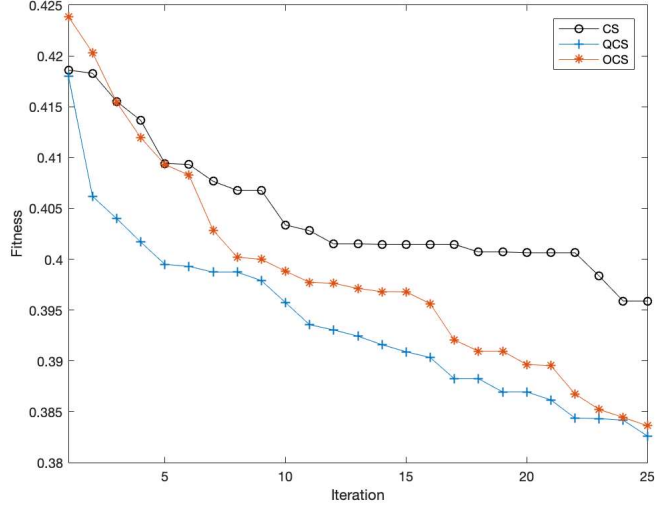


(a)

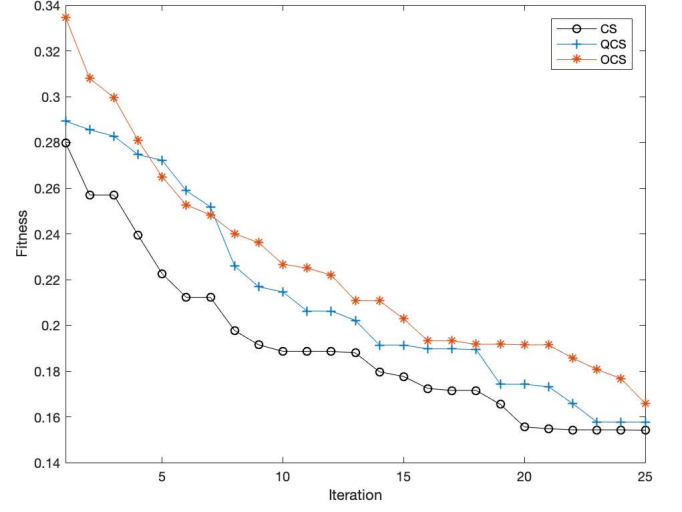

(b)

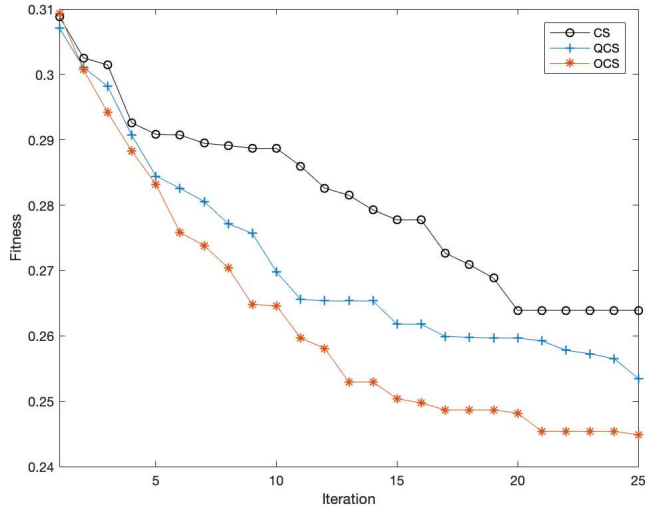

(c)

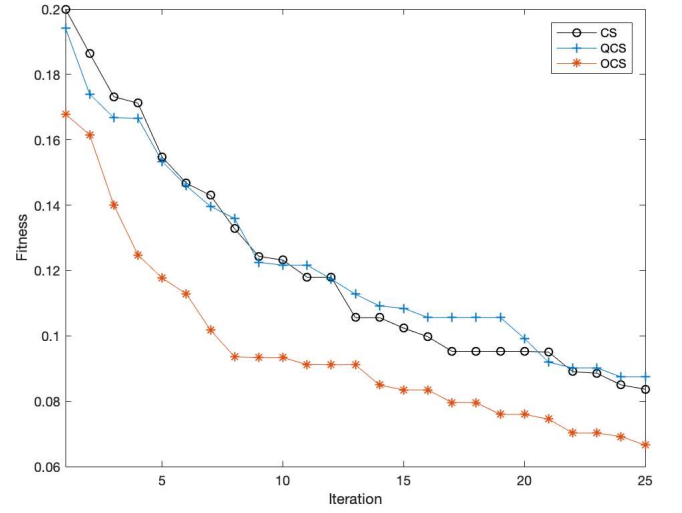

(d)

Figure 7: Iteration x Fitness chart considering CS, QCS and OCS in: (a) DNA, (b) NTL-Commercial, (c) Phishing and (d) Segment datasets.

360 classification. Nevertheless, it should be remarked that in the BASEHOCK dataset, where the baseline classification achieved the best accuracy, all other meta-heuristic techniques could decrease by about 35% of the number of features while scoring 2-3% lower accuracy than OPF.

An intriguing fact is that CS was able to obtain the lowest number of features in nearly every dataset, but not necessarily the best accuracy. If one 365 perceives the discrepancy between the best and the worst accuracy considering all datasets (except NTL-based ones) and meta-heuristic techniques, there is not a single one that exceeds the 4.77% limit. Nonetheless, CS underwent in the NTL datasets (energy theft identification), which are highly unbalanced 370 and have a comparatively small amount of features. As CS obtained the lowest number of features in such a low-dimensional dataset, it is reasonable to mention that it has overfitted the optimization process in an attempt to find the lowest number of possible features. Such a procedure penalized the classifier and, consequently, achieved a not proper accuracy for these particular datasets.

375 Furthermore, we presented a more in-depth analysis considering CS and its variants, QCS, and OCS, among four distinct datasets that have discrepant data, i.e., datasets with a low amount of features and highly sensitive to feature selection. This analysis provided thoughtful insights regarding the number of selected features per accuracy they were able to achieve, the time they took to perform the optimization process, and their convergence process. Additionally, 380 it is essential to highlight that CS hypercomplex-based approaches took more time than their standard version, while they were able to converge better (to a lower fitness function value) than its naïve version.

For future works, we aim at exploring within more depth the hypercomplex 385 mapping function, e.g., norm function. We have high hopes in understanding more the hypercomplex structure, as it seems that one of the central concepts in applying them to feature selection methods lies in transferring values from hypercomplex- to real-valued search spaces.

Acknowledgements

390 The authors appreciate FAPESP grants #2013/07375-0, #2014/12236-1,
#2016/19403-6, #2017/02286-0, #2017/25908-6, #2018/21934-5 and #2019/02205-
5, and CNPq grants 307066/2017-7 and 427968/2018-6.

References

- [1] X.-S. Yang, Engineering Optimization: An Introduction with Metaheuristic
395 Applications, 1st Edition, Wiley Publishing, 2010.
- [2] B. K. Oh, K. J. Kim, Y. K. H. S. Park, H. Adeli, Evolutionary learning
based sustainable strain sensing model for structural health monitoring of
high-rise buildings, Applied Soft Computing 58 (2017) 576–585.
- [3] S. Klein, M. Staring, J. Pluim, Evaluation of optimization methods for
400 nonrigid medical image registration using mutual information and b-splines,
IEEE Transactions on Image Processing 16 (12) (2007) 2879–2890.
- [4] N. Dey, S. Samanta, S. Chakraborty, A. Das, S. Chaudhuri, S. Sheli, J. Suri,
Firefly algorithm for optimization of scaling factors during embedding of
manifold medical information: an application in ophthalmology imaging,
405 Journal of Medical Imaging and Health Informatics 4 (3) (2014) 384–394.
- [5] G. H. Rosa, J. P. Papa, A. N. Marana, W. Scheirer, D. D. Cox, Fine-
tuning convolutional neural networks using harmony search, in: Progress in
Pattern Recognition, Image Analysis, Computer Vision, and Applications,
Vol. 9423 of Lecture Notes in Computer Science, Springer International
410 Publishing, 2015, pp. 683–690, 20th Iberoamerican Congress on Pattern
Recognition.
- [6] J. P. Papa, G. H. Rosa, K. A. P. Costa, A. N. Marana, W. Scheirer, D. D.
Cox, On the model selection of Bernoulli restricted Boltzmann machines
through harmony search, in: Proceedings of the Genetic and Evolutionary

- 415 Computation Conference, GECCO '15, ACM, New York, USA, 2015, pp. 1449–1450.
- [7] J. P. Papa, W. Scheirer, D. D. Cox, Fine-tuning deep belief networks using harmony search, *Applied Soft Computing* 46 (2016) 875–885.
- [8] J. P. Papa, G. H. Rosa, A. N. Marana, W. Scheirer, D. D. Cox, Model
420 selection for discriminative restricted Boltzmann machines through meta-heuristic techniques, *Journal of Computational Science* 9 (2015) 14–18.
- [9] D. P. Bertsekas, *Nonlinear Programming*, Athena Scientific, Belmont, 1999.
- [10] X. M. Hu, J. Zhang, Y. Yu, H. S. H. Chung, Y. L. Li, Y. H. Shi, X. N. Luo,
425 Hybrid genetic algorithm using a forward encoding scheme for lifetime maximization of wireless sensor networks, *IEEE Transactions on Evolutionary Computation* 14 (5) (2010) 766–781.
- [11] W. N. Chen, J. Zhang, Y. Lin, N. Chen, Z. H. Zhan, H. S. H. Chung, Y. Li, Y. H. Shi, Particle swarm optimization with an aging leader and challengers, *IEEE Transactions on Evolutionary Computation* 17 (2) (2013)
430 241–258.
- [12] E. Pitzer, M. Affenzeller, *A Comprehensive Survey on Fitness Landscape Analysis*, Springer, Berlin, 2012.
- [13] R. Kohavi, G. H. John, Wrappers for feature subset selection, *Artificial Intelligence* 97 (1-2) (1997) 273–324.
- 435 [14] N. Sánchez-Marono, A. Alonso-Betanzos, M. Tombilla-Sanromán, Filter methods for feature selection—a comparative study, in: *International Conference on Intelligent Data Engineering and Automated Learning*, Springer, 2007, pp. 178–187.
- [15] I. Fister, X.-S. Yang, J. Brest, I. F. Jr., Modified firefly algorithm using quaternion representation, *Expert Systems with Applications* 40 (18)
440 (2013) 7220–7230.

- [16] I. Fister, J. Brest., I. F. Jr., X.-S. Yang, Modified bat algorithm with quaternion representation, in: IEEE Congress on Evolutionary Computation, 2015, pp. 491–498.
- 445 [17] J. P. Papa, D. R. Pereira, A. Baldassin, X.-S. Yang, On the harmony search using quaternions, in: F. Schwenker, H. M. Abbas, N. El-Gayar, E. Trentin (Eds.), Artificial Neural Networks in Pattern Recognition: 7th IAPR TC3 Workshop, ANNPR, Springer International Publishing, Cham, 2016, pp. 126–137.
- 450 [18] J. P. Papa, G. H. Rosa, D. R. Pereira, X.-S. Yang, Quaternion-based deep belief networks fine-tuning, Applied Soft Computing 60 (2017) 328–335.
- [19] J. C. Hart, G. K. Francis, L. H. Kauffman, Visualizing quaternion rotation, ACM Transactions on Graphics (TOG) 13 (3) (1994) 256–276.
- [20] J. T. Graves, On a connection between the general theory of normal couples
455 and the theory of complete quadratic functions of two variables, Philosophical Magazine 26 (173) (1845) 315–320.
- [21] S. D. Leo, Quaternions and special relativity, Journal of Mathematical Physics 37 (6) (1996) 2955–2968.
- [22] D. Finkelstein, J. M. Jauch, S. Schiminovich, D. Speiser, Foundations of
460 quaternion quantum mechanics, Journal of Mathematical Physics 3 (2) (1962) 207–220.
- [23] D. Eberly, Quaternion algebra and calculus, Tech. rep., Magic Software (2002).
- [24] J. P. Papa, A. X. Falcão, C. T. N. Suzuki, Supervised pattern classification
465 based on optimum-path forest, International Journal of Imaging Systems and Technology 19 (2) (2009) 120–131.
- [25] J. P. Papa, A. X. Falcão, V. H. C. Albuquerque, J. M. R. S. Tavares, Efficient supervised optimum-path forest classification for large datasets, Pattern Recognition 45 (1) (2012) 512–520.

- 470 [26] J. P. Papa, G. H. de Rosa, X.-S. Yang, On the Hypercomplex-Based Search Spaces for Optimization Purposes, Springer International Publishing, Cham, 2018, pp. 119–147.
- [27] M. Hollander, D. A. Wolfe, E. Chicken, Nonparametric Statistical Methods, Vol. 751, John Wiley & Sons, Hoboken, NJ, USA, 2013.
- 475 [28] F. Wilcoxon, Individual comparisons by ranking methods, Biometrics Bulletin 1 (6) (1945) 80–83.
- [29] D. Karaboga, B. Basturk, A powerful and efficient algorithm for numerical function optimization: Artificial bee colony (ABC) algorithm, Journal of Global Optimization 39 (3) (2007) 459–471.
- 480 [30] M. M. E. A. Nickabadi, R. Safabakhsh, A novel particle swarm optimization algorithm with adaptive inertia weight, Applied Soft Computing 11 (2011) 3658–3670.
- [31] X.-S. Yang, A. H. Gandomi, Bat algorithm: a novel approach for global engineering optimization, Engineering Computations 29 (5) (2012) 464–
485 483.
- [32] X.-S. Yang, S. Deb, Engineering optimisation by cuckoo search, International Journal of Mathematical Modelling and Numerical Optimisation 1 (2010) 330–343.
- [33] X.-S. Yang, Firefly algorithm, stochastic test functions and design optimi-
490 sation, International Journal Bio-Inspired Computing 2 (2) (2010) 78–84.
- [34] S.-S. Yang, M. Karamanoglu, X. He, Flower pollination algorithm: A novel approach for multiobjective optimization, Engineering Optimization 46 (9) (2014) 1222–1237.
- [35] J. Kennedy, R. C. Eberhart, Swarm Intelligence, Morgan Kaufmann Publishers Inc., San Francisco, USA, 2001.
495